




PALLET 1208

Used for stacking, storing and moving goods using a forklift

- 100% Recyclable, Environmentally friendly
- Cost-effective

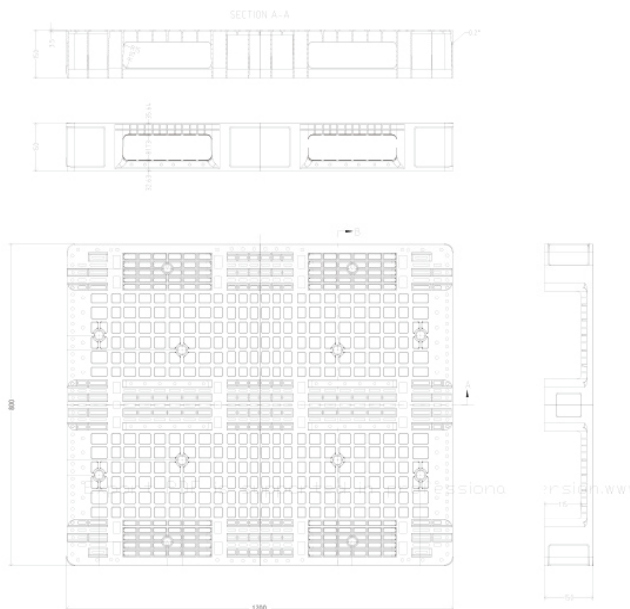

Product Family

PALLET 1210

Related Products

PALLET ROUND STOPPER PALLET RECTANGULAR STOPPER

Quality

All our products are produced in quality controlled environment taking into consideration food safety and hygiene standards under certified ISO 9001:2000 & ISO 9001:2008 and GMP quality management system. Our Quality System is regularly audited by third party.



Disclaimer

Consumer Safety is extremely important for Industrium. Therefore all our food-contact materials and articles are produced taking into consideration national and international regulations, and do not transfer their constituents to the food under normal or foreseeable conditions of use. The foregoing data are without engagement and constitute the best of our knowledge; they are reliable if applied correctly and adapted to local conditions and cannot be taken as any guarantee, since the processing at the end-user are beyond our control. The above mentioned guidelines are supplied to assist the buyer in determining the proper use of products. However, because every food supplier's recipes, ingredients, processes and supply chain are unique, these guidelines are not a substitute for product testing. Confirmation of product acceptability under customer's specific conditions of use must be done by the customer.

Properties

Material :High Density Polyethylene
Or Polypropylene

Material composition

Option 1 :99.2% Recycled HDPE
0.8% Masterbatch

Option 2 :99.2% Recycled PP
0.8% Masterbatch

Option 3 :99.2% Virgin HDPE
0.8% Masterbatch

Option 4 :99.2% Virgin PP
0.8% Masterbatch

Option 5 :99.2% Virgin Unbreakable PP
0.8% Masterbatch

Manufacturing Process :Injection Moulding

Length (mm) :1200

Width (mm) :800

Height (mm) :150

Weight (kg) :13

Color(s) :Customizable

Accessories used

Pallet Round Stopper

Pallet Rectangular Stopper

Types

Premium / Standard

Packaging

Packaging :Plastic Shrink Wrap

Temperature Range

-20 to +60 ° C

Ordering Option(s)

Standard / Premium

Custom Color

Custom Logo Engraving