
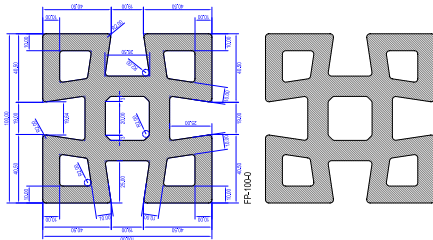


WPC FENCING CORNER COLUMN

Used for fence, boundary walls and partitions in a curved area

- 100% Recyclable, Environmentally friendly
- Cost-effective
- Minimal to zero maintenance
- Orderless, UV resistance, Stain resistance, Anti-slippery, No rotting, No splintering



Product Family

WPC FENCING COLUMN

Related Products

- | | |
|--------------------------------------|----------------------------|
| WPC FENCING COLUMN | WPC FENCING COLUMN FILLER |
| WPC FENCING COLUMN CORNER FILLER | WPC CENTER PROFILE |
| WPC GROVER CENTER PROFILE | WPC FENCING BOTTOM PROFILE |
| WPC FENCING TOP CLOSER PROFILE | WPC FENCING COLUMN CAP |
| WPC FENCING MIDDLE SEPARATOR PROFILE | |
| WPC MALE-FEMALE FENCE SEPARATOR | |
| WPC FEMALE-FEMALE FENCE SEPARATOR | |
| WPC MALE-MALE FENCE SEPARATOR | |

Quality

All our products are produced in quality controlled environment taking into consideration food safety and hygiene standards under certified ISO 9001:2000 & ISO 9001:2008 and GMP quality management system. Our Quality System is regularly audited by third party.



Disclaimer

Consumer Safety is extremely important for Industrium. Therefore all our food-contact materials and articles are produced taking into consideration national and international regulations, and do not transfer their constituents to the food under normal or foreseeable conditions of use. The foregoing data are without engagement and constitute the best of our knowledge; they are reliable if applied correctly and adapted to local conditions and cannot be taken as any guarantee, since the processing at the end-user are beyond our control. The above mentioned guidelines are supplied to assist the buyer in determining the proper use of products. However, because every food supplier's recipes, ingredients, processes and supply chain are unique, these guidelines are not a substitute for product testing. Confirmation of product acceptability under customer's specific conditions of use must be done by the customer.

Properties

Material	: Wood Plastic Composite
Material composition	: Wood powder <60% High-Density Polyethylene <40% Inert Proprietary Ingredients <10%
Manufacturing Process	: Extrusion
Length (mm)	: Recommended: 2100 Customizable
Base width (mm)	: 100.00
Base length (mm)	: 100.00
Weight (kg/m)	: 7.05 ± 5%
Density (g/m ³)	: > 1.1
Color(s)	: Standard: Brown, Grey Customizable
Surface finish	: Plain

Packaging

Packaging : Plastic Shrink Wrap

Ordering Option(s)

- Custom Color
- Custom Length
- Fire Rated/Not Fire Rated