






WPC HOLLOW PROFILE

Used for general applications

- 100% Recyclable, Environmentally friendly
- Cost-effective
- Minimal to zero maintenance
- Orderless, UV resistance, Stain resistance, Anti-slippery, No rotting, No splintering

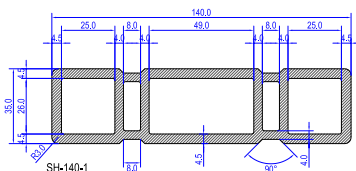

Properties

| | |
|-----------------------------|--|
| Material | : Wood Plastic Composite |
| Material composition | : Wood powder <60% High-Density Polyethylene <40% Inert Proprietary Ingredients <10% |
| Manufacturing Process | : Extrusion |
| Length (mm) | : Recommended: 2200 Customizable |
| Width (mm) | : 140.00 |
| Thickness (mm) | : 35.00 |
| Weight (kg/m) | : 2.05 ± 5% |
| Density (g/m ³) | : > 1.1 |
| Color(s) | : Standard: Brown, Grey Customizable |
| Surface finish | : Plain/Sanding/Brushing Sanding & Embossing Brushing & Embossing |

Packaging

Packaging : Plastic Shrink Wrap

Ordering Option(s)

Plain surface/Treated surface
Custom Color
Custom Length
Fire Rated/Not Fire Rated

Quality

All our products are produced in quality controlled environment taking into consideration food safety and hygiene standards under certified ISO 9001:2000 & ISO 9001:2008 and GMP quality management system. Our Quality System is regularly audited by third party.



Disclaimer

Consumer Safety is extremely important for Industrium. Therefore all our food-contact materials and articles are produced taking into consideration national and international regulations, and do not transfer their constituents to the food under normal or foreseeable conditions of use. The foregoing data are without engagement and constitute the best of our knowledge; they are reliable if applied correctly and adapted to local conditions and cannot be taken as any guarantee, since the processing at the end-user are beyond our control. The above mentioned guidelines are supplied to assist the buyer in determining the proper use of products. However, because every food supplier's recipes, ingredients, processes and supply chain are unique, these guidelines are not a substitute for product testing. Confirmation of product acceptability under customer's specific conditions of use must be done by the customer.